VICTORY

PROJECT: .	
ITEM #	

MODEL # _ AIA #

REFRIGERATION

36°F To 38°F

.

With All Environmental Concerns

Epoxy Coated Evaporator Coil

Rear Mounted Refrigeration System

More Consistent Product Temperatures

SIS

WORKTOP REFRIGERATOR WITH DRAWERS VWRD119HC-6



EXCLUSIVE WARRANTY

- **6 Year Parts & Labor Warranty**
- 7 Year Compressor Warranty
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)



Refrigeration System Uses R-290 Refrigerant To Comply

Adaptive Defrost For Reduced Energy Consumption And

Refrigerator Capable Of Maintaining Product Temperature



CABINET CONSTRUCTION

- · Stainless Steel Exterior (galvanized back & bottom)
- Aluminum Interior
- · 20 Gauge Stainless Steel Doors And Drawers
- 4" High, Foamed-In-Place Backsplash
- One Piece, Snap-In Magnetic Door/Drawer Gaskets
- 6" Casters, Two With Brakes
- 8' Cord And Plug (see electrical data for details)

FEATURES

- Full Electronic Control
- Stay-Open Drawer Feature For Easy Product Loading
- Low Profile Horizontal Door/Drawer Handles
- · Heavy-Duty Spring Loaded Cartridge Hinges
- Heavy-Duty Pan Supports Provided
- Drawers Accommodate 6" Deep Full Size Food Service Pans (pans not included)
- Telescoping Drawer Slides With Locking Mechanism
- Epoxy Coated Shelves (2 per section)

OPTIONS & ACCESSORIES

- Stainless Steel Interior
- · Stainless Steel Back
- Secure-Temp[™] Technology
- Door/Drawer Locks
- · Door Swing Orientation (at time of order)
- Cutting Board
- · Additional Shelves
- Shelf Clips
- 6" Legs Or 6" Seismic Legs
- · Casters: 3", Roller Kit, Low Profile
- Correctional Package
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note on back on page)

3779 Champion Blvd, Winston-Salem, NC 27105

ph: (888) 845-9800 fax: (800) 253-5168


Sales@VictoryRefrigeration.com VictoryRefrigeration.com


APPROVAL: ____




VICTORY WORKTOP REFRIGERATOR WITH DRAWERS

VWRD119HC-6

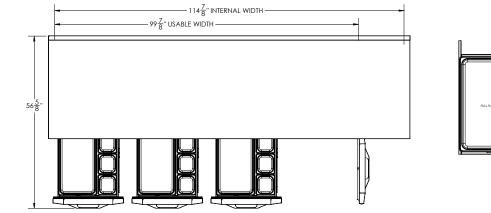



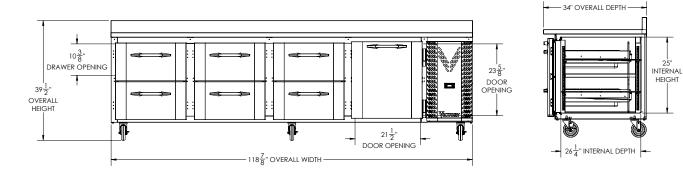

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

CHARACTERISTICS		ELECTRICAL DATA		SHIPPING DETAILS	
Net Capacity (cubic ft.)	40.12	Cabinet Voltage	115/60/1	Height	44"
Width, Overall (in.)	118 7/8"	Total Amperes	5.0	Width	122″
Depth, Overall (with handle)	34″	NEMA Plug (8' cord)	5-15P	Depth	35″
Height Overall (6" casters)	39 1/2"	REFRIGERATION DATA		Crated Weight	732 lbs
Depth, Drawer Open 90°	56 5/8″	Condensing Unit Size, HP	1/3	*NOTE: Remote units are field wired and comes with 6' legs. Refrigerant must be specified at time of order.	
Door Opening (in.)	21 1/2" x 23 5/8"	Refrigerant*	R-290		
Drawer Openings (in.)	21 1/2" x 10 3/8"	Capacity (BTU/HR) (100°F/20°F)	2630		
No. Of Doors/Shelves/Drawers	1/2/6	Heat Rejection (BTU/HR)	3945		
Required Clearance: 3" Bot	tom & 2" Rear	Charge (lbs/grams)	0.3086/140		

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 10/5/23 Printed in U.S.A.

an Ali Group Company

