OVENS



VC6E SERIES SINGLE DECK, DEEP DEPTH ELECTRIC CONVECTION OVENS

Item #



Model VC6ED
Shown with optional casters









SPECIFICATIONS

Single section, deep depth electric convection oven, Vulcan Model No. (VC6ED) (VC6EC). Stainless steel front, sides and top. Painted legs. Independently operated stainless steel doors with double pane windows. Non-sag insulation applied to the top, rear, sides, bottom and doors. Porcelain enamel on steel oven interior measures 29"w x $26\frac{1}{8}$ "d x 20"h. Two interior oven lights. Five nickel plated oven racks per section measure $28\frac{1}{4}$ " x $24\frac{1}{2}$ ". Eleven position nickel plated rack guides with positive rack stops. Heated by electric solid sheath elements rated at 12 KW. Furnished with a two speed $\frac{1}{2}$ H.P. oven blower-motor. Oven cool switch for rapid cool down. 208 or 240 volt, 60 Hz, 1 or 3 phase.

Exterior Dimensions:

 $40 \ ^{1}\$

NSF listed. UL listed. UL listed to Canadian safety standards.

- □ VC6ED Solid state temperature controls adjust from
 - 150° to 500° F. 60 minute timer with audible
 - alarm.
- □ **VC6EC** Computer controls with digital time and

temperature readouts. 99-hour timer with audible alarm. Roast and Hold cycle.

One hundred programmable menu selections.

Shelf I.D. programming.

STANDARD FEATURES

- Stainless steel front, sides and top.
- Painted legs.
- Independently operated stainless steel doors with double pane windows.
- 12.5 total KW.
- ½ H.P. two speed oven blower-motor.
- Moisture vent.
- Oven cool switch for rapid cool down.
- Porcelain enamel on steel oven interior.
- Five nickel plated oven racks with eleven rack positions.
- One year limited parts and labor warranty.

OPTIONS

- ☐ Complete prison package.
 - ☐ Security screws only.
- ☐ Stainless steel legs.
- ☐ Casters.
- ☐ Simultaneous chain driven doors.
- ☐ 480V/60 Hz/1 or 3 phase.
- ☐ Second year extended limited parts and labor warranty.

ACCESSORIES

- ☐ Stainless steel rear motor enclosure.
- □ Extra oven rack(s).
- ☐ Rack hanger(s).
- ☐ Stainless steel drip pan.
- □ Down draft flue diverter for direct vent connection.






VC6E SERIES SINGLE DECK, DEEP DEPTH ELECTRIC CONVECTION OVENS


OPTIONAL VOLTAGES

- ☐ 480 volt, 60 Hz, 3 phase.
- ☐ 220/380 volt, 50 Hz, 1 phase, 3 wire.
- ☐ 220/380 volt, 50 Hz, 3 phase, 4 wire.
- ☐ 240/415 volt, 50 Hz, 3 phase, 4 wire.

CLEARANCES

	Combustible	Non-Combustible				
Rear	2"	2"				
Right Side	4"	4"				
Left Side	1"	1"				

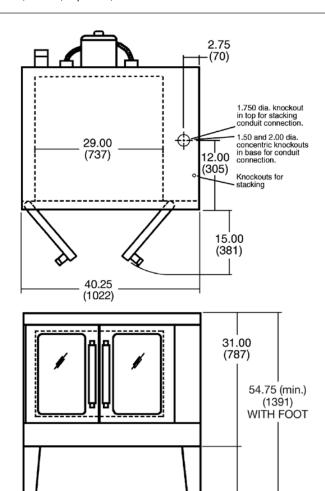



		3	PHAS	SE	NOMINAL AMPS PER LINE WIRE										WEIGHT				
			LOAD		3 PHASE									WITH		WITHOUT			
MODEL	TOTAL CONN.	KW PER PHASE		208 VOLT			240 VOLT			480 VOLT			1 PHASE		SKID & PACKAGING		SKID & PACKAGING		
NO.	KW	X-Y	Y-Z	X-Z	Х	Υ	Z	Х	Υ	Z	Х	Υ	Z	208V	240V	LBS.	KG	LBS.	KG
VC6E	12.5	4	4	4.5	35	33	35	33	29	33	14	15	15	60	52	463	210	405	184

23.75 (min.) (603) WITH FOOT



a division of ITW Food Equipment Group LLC

P.O. Box 696 Louisville, KY 40201 Toll-free: 1-800-814-2028 Local: 502-778-2791 Quote & Order Fax: 1-800-444-0602

