

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

SCHOOL MILK FORCED AIR COOLER

STF49HC Dual Access Cooler **Hydrocarbon Series**

MODEL: STF49HC-1-S



5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

CABINET CONSTRUCTION

- Stainless steel exterior and interior
- Stainless steel lids, hinged doors and door latches
- Full electronic control
- Dual sided access
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- · Flexible compression door gaskets, ensures a tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder locks
- 5" Heavy-duty plate casters (2 with locks)
- Balanced, forced-air refrigeration system provides rapid chilling of

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Corner bumpers
- Cafeteria tray slides
- Graphics

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Maintains product temperature between 36°F-40°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	STF49HC-1-S	
EXTERNAL DIMENSIONAL DATA		
Width Overall	49"	
Depth Overall	34"	
Height Overall with Casters	47 ³ ⁄ ₄ "	
Number of Lids/Doors	Dual Access	
Both Lids Extended	64"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	20.55	
Internal Width Overall (in)	46"	
Internal Depth Overall (in)	30"	
Internal Height Overall (in)	24 %"	
CASE CAPACITY		
13" X 13" X 11"	12	
19" X 13" X 11"	8	
ELECTRICAL DATA		
Full Load Amperes	2.46	
REFRIGERATION DATA		
Horsepower	1/4	
Capacity (BTU/Hr)	1851	
Heat Rejection (BTU/Hr)	2776.5	
Charge (lbs/grams/ounces)	0.1562 / 70 / 2.5	
SHIPPING DATA		
Gross Weight - Crated	334 lbs	
Height - Crated	55"	
Width - Crated	54"	
Depth - Crated	38"	

School Milk Cooler - Dual Access

Model: STF49HC-1-S

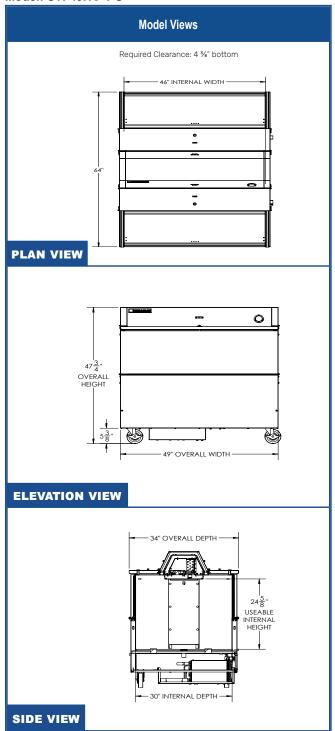



ELECTRICAL CONNECTION



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.