

# MARKETMAX DUAL-TEMP REFRIGERATOR/FREEZER

MMRF72HC White Hinged Triple Glass Door **Hydrocarbon Series** 



## 5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

- Exterior features durable white painted steel
- Heavy duty interior construction includes white coated steel walls
- Brightly lit sign panel
- LED lighting
- Modern one-piece grille
- Full electronic control with digital display
- Dual-temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- Self-contained bottom mount refrigeration system
- Left: refrigerator double section has double pane lowE glass doors
- Right: freezer single section has triple pane lowE glass door
- Self-closing doors with 120° stay-open feature
- Snap-in gaskets, easy to remove for cleaning or replacement
- Self-contained bottom mount refrigeration system
- Fifteen (15) heavy-duty epoxy coated wire shelves
- Four (4) shelf clips included per shelf
- Leveling feet standard

#### **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel or black exterior option
- · Stainless steel or black interior option
- · Shelves black or white
- Stainless steel clips
- Flow track
- Gravity-Flo track
- Price tag molding
- 3" or 6" Casters
- 6" Legs or seismic/flanged legs
- Door locks (swing doors only)
- Custom signage & decals
- Remote option\* (see note on back page)

#### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE &
- Refrigerator has non-electric defrost with hot gas condensate evaporation
- Freezer has electric defrost with hot gas condensate evaporation
- · Epoxy coated evaporator coil
- Freezer maintains product temperature to -10°F
- Refrigerator maintains product temperatures between 36°F to










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	MMRF72HC-1-C-WW	
EXTERNAL DIMENSIONAL DATA		
Width Overall	75"	
Depth Overall (with handle)	33 ½"	
Height Overall	78 ½"	
Number of Doors	3	
Depth with Door Open 90 <sup>0</sup>	55 <sup>1</sup> ⁄8"	
Door Openings (in)	21 <sup>7</sup> / <sub>8</sub> " x 52 <sup>3</sup> / <sub>4</sub> "	
INTERNAL DIMENSIONAL DATA		
NET Capacity Refrigerator (cubic ft.)	(F) 44.85 (R) 19.62	
Internal Width Overall (in)	(R) 47" (F) 22"	
Internal Depth Overall (in)	28 ½"	
Internal Height Top Usable (in)	55"	
Number of Shelves	15	
ELECTRICAL DATA		
Full Load Amperes Refrigerator	(R) 3.9 (F) 6.34	
REFRIGERATION DATA		
Horsepower	(R) 1/3 (F) 3/4	
Capacity (BTU/Hr)	(R) 2291 (F) 2097	
Heat Rejection (BTU/Hr)	6582	
Charge (lbs/grams/ounces)	(R) .2425 / 110 / 3.88 (F) .2094 / 95 / 3.35	
SHIPPING DATA		
Gross Weight - Crated	842 lbs	
Height - Crated	85"	
Width - Crated	77"	
Depth - Crated	36"	

\*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

# Dual-Temp Glass Door Merchandisers

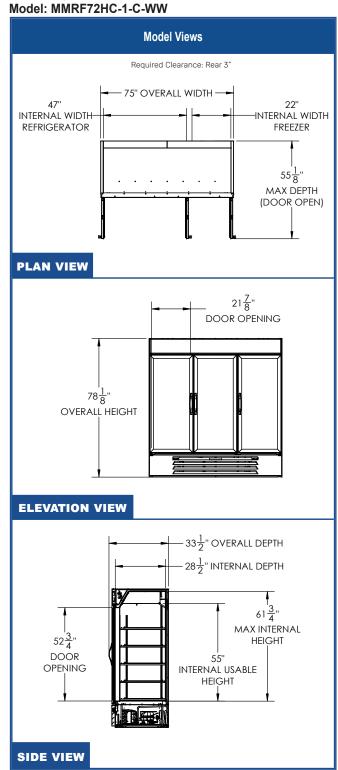

### **ELECTRICAL CONNECTION**



115/60/1 (2) NEMA 5-15P

Unit pre-wired at factory and include 8' long cord and plug set.

