




GRIDDLE MODULAR

Bistro

MODULAR BISTRO GRIDDLE

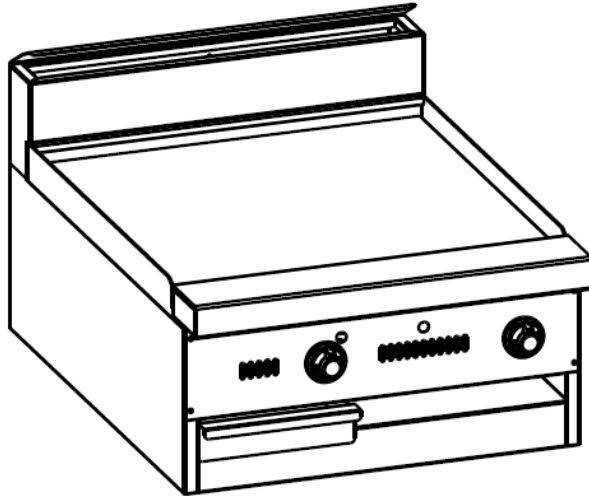

JBR-24G-M

MODEL NO.	DESCRIPTION
<input type="checkbox"/> JBR-12G-M	12" GRIDDLE MODULAR
<input type="checkbox"/> JBR-24G-M	24" GRIDDLE MODULAR
<input type="checkbox"/> JBR-36G-M	36" GRIDDLE MODULAR
<input type="checkbox"/> JBR-48G-M	48" GRIDDLE MODULAR
<input type="checkbox"/> JBR-60G-M	60" GRIDDLE MODULAR
<input type="checkbox"/> JBR-72G-M	72" GRIDDLE MODULAR

STANDARD FEATURES

- Heavy Duty Construction Welded stainless steel frame
- 1" polished steel Griddle plate
- Stainless steel pilot tips
- Stainless steel crumb tray
- Stainless steel burner box
- Stainless steel solid 4" plate shelf landing
- One 3/4" rear gas connection
- One 3/4" gas regulator
- Cast iron easy lift-off burner
- Stainless steel stub back 6" high
- Standard four year parts and labor warranty

DESCRIPTION:

Griddles are to have polished 1" steel plate with 24,000 BTU burner every 12". Unit to be provided with 3/4" gas regulator

BASE OPTIONS:

- Floor length legs
- Refrigerator base (remote or self-contained)
- Freezer base (remote or self-contained)

AVAILABLE OPTIONS

- "Thermostat" controls
- 36" flex hose with quick disconnect
- 48" flex hose with quick disconnect
- Additional oven rack (one supplied per oven)
- Stainless Steel 22" high riser or 22" single high shelf
- Stainless Steel 34" high riser or 34" double high shelf
- Casters 6" - with 5" wheel diameter
- Counter top legs - 4" tall

WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 •
PHONE: 800-884-5233 • FAX: 714-961-2550

Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. Printed in USA



Intertek
Comforms to
ANSI/NSF Std 4






GRIDDLE MODULAR

Bistro

MODULAR BISTRO GRIDDLE

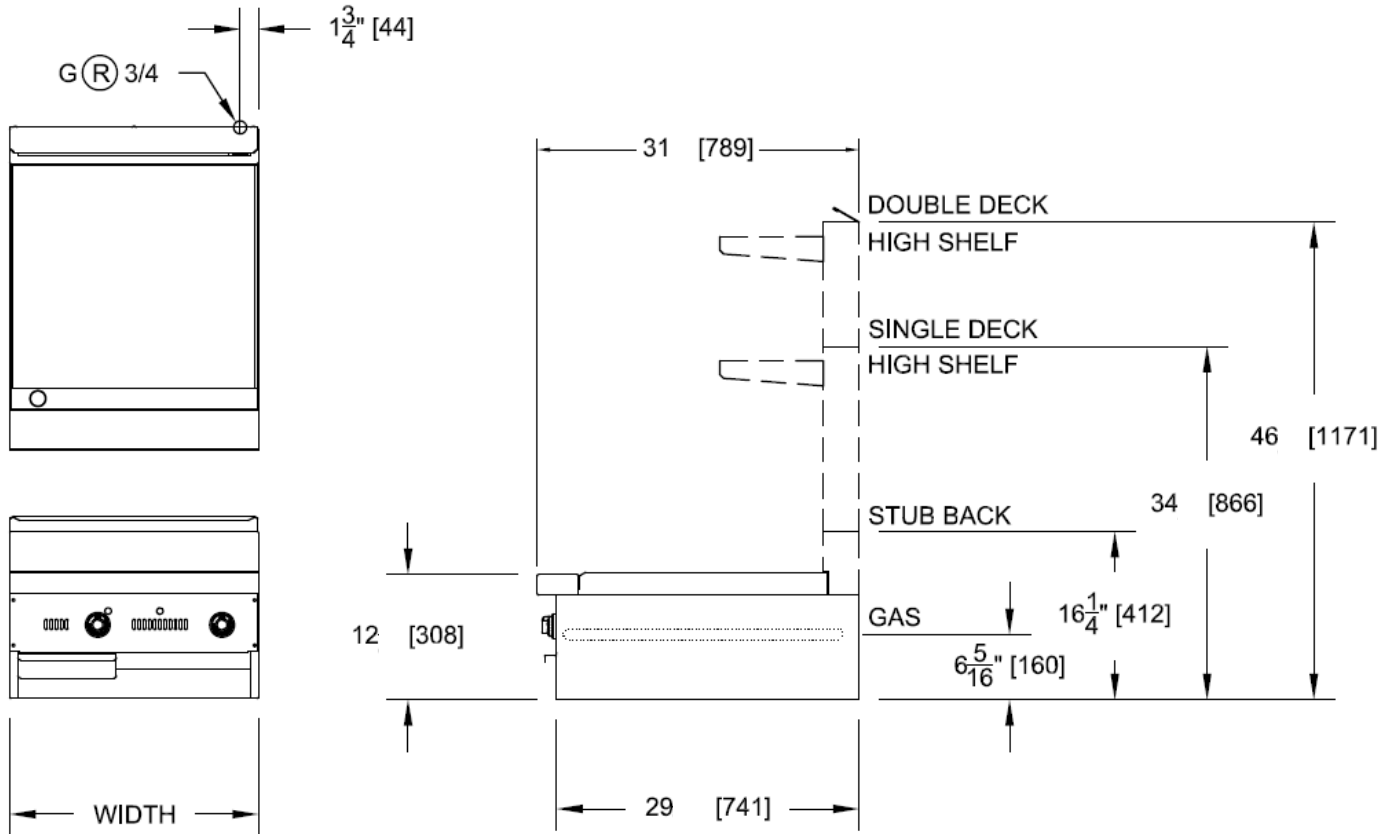

MODEL	BTU'S	WIDTH	DEPTH	HEIGHT	APPX. SHP. WT
JBR-12G-M	24,000	12"	31"	12"	300 LBS.
JBR-24G-M	48,000	24"	31"	12"	300 LBS.
JBR-36G-M	72,000	36"	31"	12"	450 LBS.
JBR-48G-M	96,000	48"	31"	12"	600 LBS.
JBR-60G-M	120,000	60"	31"	12"	750 LBS.
JBR-72G-M	144,000	72"	31"	12"	900 LBS.

Note: This unit must be connected with the gas appliance regulator supplied

UTILITY INFORMATION:

- 3/4" Connection - see drawing for location
- Required operating pressure:
Natural Gas: 5" W.C. minimum
Propane Gas: 5" W.C. minimum



Intertek
Comforms to
ANSI/NSF Std 4

WWW.JADERANGE.COM

JADE RANGE, LLC., A MIDDLEBY COMPANY • 2650 Orbiter Street • Brea, CA 92821 •
PHONE: 800-884-5233 • FAX: 714-961-2550

Note: In line with their policy to continually improve products, Jade reserves the right to change materials and specifications without notice. Printed in USA

