



Therma-Tek  
 115 Rotary Drive, Valmont Industrial Park  
 West Hazleton, PA 18202



TSP18

**COMMERCIAL GAS STOCK POT RANGES**

**STANDARD FEATURES**

- \* Fully stainless steel exterior.
- \* Sturdy base constructed of corrosion resistant aluminized steel.
- \* 6" (152.5 mm) adjustable legs.
- \* Gas pressure regulator.
- \* Heavy, one piece cast iron top grate.
- \* Ignition by standing pilot.
- \* Drip pan is easily removed for cleaning.
- \* Two year limited parts and labor warranty.

**BURNERS**

- \* One 100,000 BTUs (29.31 kW) three-ring cast iron burner (TSP18/36).
- \* One brass jet burner 135,000 BTUs (39.5kW) for high heat cooking (TJBSP18).
- \* Two infinite heat control valves per section on TSP models.
- \* One infinite heat control valve on model TJBSP18.
- \* Spill proof pilot ignition system.

**OPTIONAL FEATURES**

- \* 6" (152.5 mm) casters.
- \* Gas flex hose w/ quick disconnect and restraining device.
- \* Double width model TSP36 available.
- \* Double depth model TSP18-2 available.




TJBSP18  
 (Shown with optional Jet Burner)





Therma-Tek  
115 Rotary Drive, Valmont Industrial Park  
West Hazleton, PA 18202

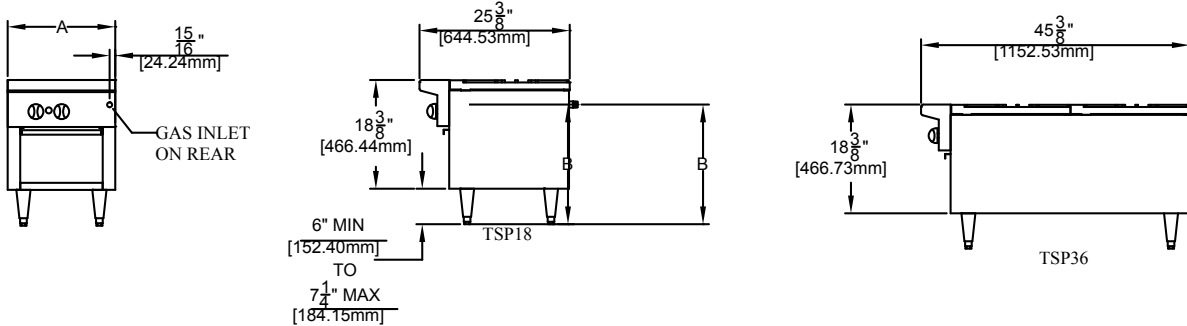

Model Number	Dimension "A"		Dimension "B"	
	inches	mm	inches	mm
TSP18	18	457	20.25	514
TSP18-2	18	457	20.25	514
TSP36	36	915	20.25	514
TJBSP18	18	457	11.875	301.5

GAS REQUIREMENTS								
Operating Manifold Gas Pressure				Input Rating per Burner				
Natural		Propane		Manifold Connection	Three-ring Cast Iron Burner		Brass Jet Burner	
"WC	mbar	"WC	mbar		Total BTU/Hr	kW	Total BTU/Hr	kW
5	12.45	10	24.9	3/4" NPT	100,000	29.31	135,000	39.56

Model Number	Total gas consumption per model		Gross Weight	
	Total BTU/Hr	kW	Lbs.	Kg
TSP18	100,000	29.31	150	68.10
TSP18-2	200,000	58.62	315	143.01
TSP36	200,000	58.62	315	143.01
TJBSP18	135,000	39.56	150	68.10

NOTE: Add suffix "N" for natural gas, and "L" for propane.

CLEARANCES	Sides	Back
Non Combustible	0"	0"
Combustible	12" (304.8 mm)	12" (304.8 mm)

**Installation Notes**

This product is NOT approved for residential use.  
Please advise us of installation over 2000ft. (610m) altitude.  
Installation clearance reduction applies only where local codes permit.  
All Therma-Tek products are covered by a two year limited parts and labor warranty.  
A detailed warranty is included with the appliance or is available upon request.  
Installation and/or operation by other than manufacturer's recommendations may void warranty.  
*Because of continuing product improvement, these specifications are subject to change without notice.*

