	BEVERAGE-AIR.
--	---------------

A CE LO	BEVERAGE-AIR.	Pro Ite Loc
		I Ap

SIDE MOUNT UNDERCOUNTER DRAWER REFRIGERATOR

UCRD119AHC Solid Doors Refrigerator With Drawers **Hydrocarbon Series**

> 5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty



CABINET CONSTRUCTION

- Stainless steel front, sides, top, doors, drawers and grille (galvanized steel back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Full electronic control
- Undercounter feature a 1/2" thick sub-top
- · Interior thermometer is standard
- Self-closing doors with 120° stay-open feature, on lift-off hinges
- Magnetic gasket attached to each door for positive seal
- Six (6) epoxy-coated steel wire shelves
- Field-reversible doors
- Snap-in drawer gaskets
- Upper and lower pull-out drawers accommodate 6" deep pans
- Stainless steel drawer frames supported on telescoping drawer slides
- Drawer slides include locking mechanism that prevents drawer from being inadvertently pulled off cabinet
- 6" Casters, (2) with brakes standard

OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel back
- Stainless steel interior
- 16 Gauge stainless steel top
- · Additional shelves
- Shelf clips
- Right or left hinged door
- Locks (doors only)
- · Wire shelf divider
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option* (see note on back on page)

REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F









MODEL	UCRD119AHC-2		
EXTERNAL DIMENSIONAL DATA			
Width Overall	118 1/8"		
Depth Overall with Handle & Bumper	34 ¾"		
Height Overall with 6" Casters	34 ½"		
Number of Drawers	2		
Drawer Openings	21 %" x 10 %" 21 %" x 10 ¼"		
Depth with Drawer Extended	57 ½"		
Number of Doors	3		
Depth with Door Open 90°	55 1⁄4"		
INTERNAL DIMENSIONAL DATA			
NET Capacity (cubic ft.)	40.5		
Internal Width Overall (in)	114 ½"		
Internal Depth Overall (in)	26"		
Internal Height Overall (in)	25"		
Number of Shelves	6		
ELECTRICAL DATA			
Full Load Amperes	5.0		
REFRIGERATION DATA			
Horsepower	1/3		
Capacity (BTU/Hr)	2629		
Heat Rejection (BTU/Hr)	3943.5		
Charge (lbs/grams)	0.3086/140		
SHIPPING DATA			
Gross Weight - Crated	563 lbs		
Height - Crated	48"		
Width - Crated	122"		
Depth - Crated	37"		

*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.



Undercounter Doors/Drawers Refrigerator - Side Mount Model: UCRD119AHC-2

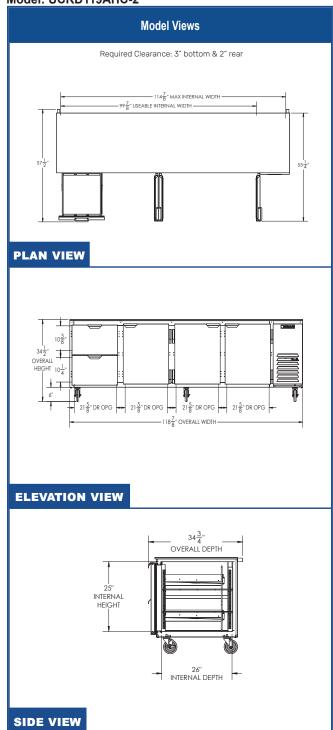

ELECTRICAL CONNECTION



115/60/1 NEMA 5-15P Unit pre-wired at factory and include 8' long cord and plug set.

