

Project:	AIA#
Item:	
Location:	SIS#
Approved:	

## SHALLOW DEPTH WORKTOP REFRIGERATOR

WTR20HC Solid Door With Foamed-In Place Backsplash Hydrocarbon Series

MODEL: WTR20HC-FIP



\*Note: Shown with optional full electronic control

5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty

#### **CABINET CONSTRUCTION**

- Stainless steel front, sides, door and grille (galvanized back & bottom)
- Interior liner is made of corrosion resistant aluminum
- Stainless steel top for added durability
- Foamed-in place backsplash
- Mechanical control
- Interior thermometer is standard
- Self-closing door with 120° stay-open feature, on cartridge style hinges
- Magnetic gasket attached to each door for positive seal
- 6" Casters, two (2) with brakes standard
- Two (2) epoxy-coated steel wire shelves
- Field-reversible door (hinge kit not included)

## **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel back
- · Stainless steel interior
- 16 Gauge stainless steel top
- Full electronic control\*
- Additional shelves
- Shelf clips
- · Glass door option
- Right or left hinged door
- Lock (solid doors only)
- · Wire shelf divider
- · Cutting board
- 3" Casters
- 6" Legs (stainless steel, black or seismic/flange)
- Low profile casters
- Roller kit
- Remote option\*\* (see note on back on page)

#### **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- · Epoxy coated evaporator coil
- Refrigerators capable of maintaining product temperature between 36°F and 38°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



MODEL	WTR20HC-FIP	
EXTERNAL DIMENSIONAL DATA		
Width Overall	20"	
Depth Overall with Handle & Bumper	24 ½"	
Height Overall with 6" Casters	36 1⁄8"	
Number of Doors	1	
Depth with Door Open 90°	40 ¾"	
Door Opening	15 %" x 18"	
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	2.34	
Internal Width Overall (in)	16"	
Internal Depth Overall (in)	13"	
Internal Height Overall (in)	19 ½"	
Number of Shelves	2	
ELECTRICAL DATA		
Full Load Amperes	2.0	
REFRIGERATION DATA		
Horsepower	1/6	
Capacity (BTU/Hr)	1110	
Heat Rejection (BTU/Hr)	1665	
Charge (lbs/grams/ounces)	0.1323 / 60 / 2.12	
SHIPPING DATA		
Gross Weight - Crated	124 lbs	
Height - Crated	35"	
Width - Crated	23"	
Depth - Crated	26"	

<sup>\*\*</sup>NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at time of order.

# Worktop Refrigerator - Shallow Depth Model: WTR20HC-FIP

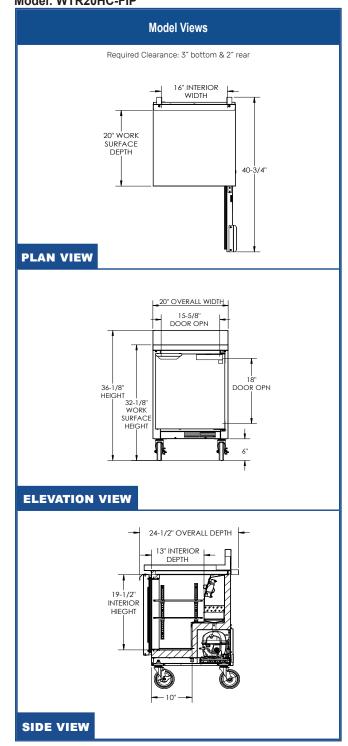



### **ELECTRICAL CONNECTION**



115/60/1

Unit pre-wired at factory and include 8' long cord NEMA 5-15P and plug set.