

| Project:  | AIA# |
|-----------|------|
| Item:     |      |
| Location: | SIS# |
| Approved: |      |

# SCHOOL MILK FORCED AIR COOLER

STF58HC Dual Access Cooler **Hydrocarbon Series** 

MODEL: STF58HC-1-W

5 Year Parts/Labor Warranty Available 7 Year Compressor Warranty



#### **CABINET CONSTRUCTION**

- White coated steel exterior
- Interior features a one-piece, stainless steel back, front, floor with galvanized side walls for maximum milk crate support
- Stainless steel lids, hinged doors and door latches
- Dual sided access
- Full electronic control
- Heavy-duty epoxy coated steel wire floor racks standard
- Floor drain is centrally located for easy cleaning and connecting to drain hose with hose adapter
- Flexible compression door gaskets, ensures a tight seal
- Self-latching doors/lids with safety bumpers
- Exterior thermometer
- Cylinder locks
- 5" Heavy-duty plate casters (2 with locks)
- Balanced, forced-air refrigeration system provides rapid chilling of product

## **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel interior on white models -02
- Corner bumpers
- · Cafeteria tray slides
- Graphics

## **REFRIGERATION SYSTEM**

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Maintains product temperature between 36°F-40°F










3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com



| MODEL                        | STF58HC-1-W       |  |
|------------------------------|-------------------|--|
| EXTERNAL DIMENSIONAL DATA    |                   |  |
| Width Overall                | 58"               |  |
| Depth Overall                | 34"               |  |
| Height Overall with Casters  | 47 ¾"             |  |
| Number of Lids/Doors         | Dual Access       |  |
| Both Lids Extended           | 64"               |  |
| INTERNAL DIMENSIONAL DATA    |                   |  |
| NET Capacity (cubic ft.)     | 24.3              |  |
| Internal Width Overall (in)  | 55"               |  |
| Internal Depth Overall (in)  | 30"               |  |
| Internal Height Overall (in) | 24 %"             |  |
| CASE CAPACITY                |                   |  |
| 13" X 13" X 11"              | 16                |  |
| 19" X 13" X 11"              | 10                |  |
| ELECTRICAL DATA              |                   |  |
| Full Load Amperes            | 2.46              |  |
| REFRIGERATION DATA           |                   |  |
| Horsepower                   | 1/4               |  |
| Capacity (BTU/Hr)            | 1851              |  |
| Heat Rejection (BTU/Hr)      | 2776.5            |  |
| Charge (lbs/grams/ounces)    | 0.1562 / 70 / 2.5 |  |
| SHIPPING DATA                |                   |  |
| Gross Weight - Crated        | 496 lbs           |  |
| Height - Crated              | 54"               |  |
| Width - Crated               | 63"               |  |
| Depth - Crated               | 38"               |  |

**School Milk Cooler - Dual Access** 

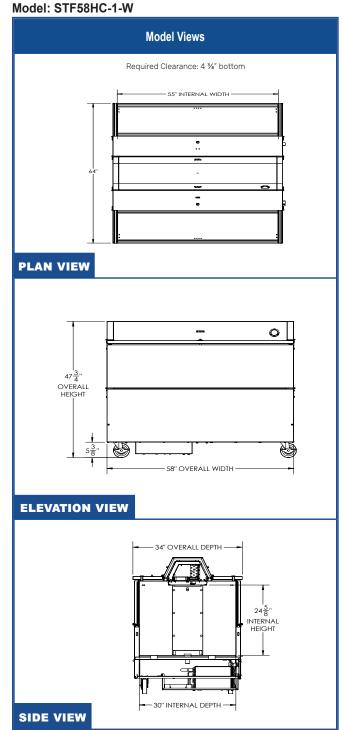



#### **ELECTRICAL CONNECTION**



Unit pre-wired at factory and include 8' long cord 115/60/1 and include 8' NEMA 5-15P and plug set.