# BEVERAGE-AIR.

Project:	AIA#
tem:	
.ocation:	SIS#
Approved:	

### MARKETMAX DUAL-TEMP REFRIGERATOR/FREEZER MMRF49HC Black Hinged Double Glass Door

MODEL: MMRF49HC-1-A-BW

## Hydrocarbon Series



### **OPTIONS & ACCESSORIES**

- 3 Year parts/labor standard, additional 2 year warranty available
- Stainless steel or white exterior option
- Stainless steel or black interior option
- Shelves black or white
- Stainless steel clips
- Smart defrost
- Flow track
- Gravity-Flo track
- Price tag molding
- 3" or 6" Casters
- 6" Legs or seismic/flanged legs
- Door locks (swing doors only)
  Electronic door lock (must be ordered at time of unit order)
- Custom signage & decals
- Remote option\* (see note on back page)

# : 🕀 us 🦁 🖉 🖊 **kci** R 🕰 🥮



3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

5 Year Parts/Labor Warranty Available

7 Year Compressor Warranty

### CABINET CONSTRUCTION

- Exterior features durable black painted steel
- Heavy duty interior construction includes white coated steel walls
- Brightly lit sign panel
- LED lighting
- Modern one-piece grille
- Full electronic control with digital display
- Dual-temp refrigerator/freezer units provide two different operating temperature zones for different types of products
- Self-contained bottom mount refrigeration system
- Left: refrigerator has double pane lowE glass door
- Right: freezer has triple pane lowE glass door
- Self-closing doors with 120° stay-open feature
- Snap-in gaskets, easy to remove for cleaning or replacement
- Ten (10) heavy-duty epoxy coated wire shelves
- Four (4) shelf clips included per shelf
- Leveling feet standard

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Refrigerator has non-electric defrost with hot gas condensate evaporation
- Freezer has electric defrost with hot gas condensate evaporation
- Epoxy coated evaporator coil
- Freezer maintains product temperature to -10°F
- Refrigerator maintains product temperatures between 36°F to  $_{38^\circ\text{F}}$




MODEL	MMRF49HC-1-A-BW	
EXTERNAL DIMENSIONAL DATA		
Width Overall	52"	
Depth Overall (with handle)	33 ½"	
Height Overall	78 ½"	
Number of Doors	2	
Depth with Door Open 90°	56 ½"	
Door Openings (in)	22 ¾" x 52 5⁄8"	
INTERNAL DIMENSIONAL DATA		
NET Capacity Refrigerator (cubic ft.)	21.01	
NET Capacity Freezer (cubic ft.)	21.01	
Internal Width Overall (in)	(R) 23" (F) 23"	
Internal Depth Overall (in)	27"	
Internal Height Usable (in)	55"	
Number of Shelves	10	
ELECTRICAL DATA		
Full Load Amperes	(R) 3.18 (F) 6.34	
REFRIGERATION DATA		
Horsepower	(R) 1/4 (F) 3/4	
Capacity (BTU/Hr)	(R) 1702 (F) 2097	
Heat Rejection (BTU/Hr)	4848	
Charge (lbs/grams/ounces)	(R) 0.1984 / 90 / 3.17 (F) 0.2094 / 95 / 3.35	
SHIPPING DATA		
Gross Weight - Crated	696 lbs	
Height - Crated	85"	
Width - Crated	54"	
Depth - Crated	36"	

\*NOTE: Remote units are field wired and come with 6" legs.

Refrigerant must be specified at time of order.

#### Dual-Temp Glass Door Merchandisers Model: MMRF49HC-1-A-BW

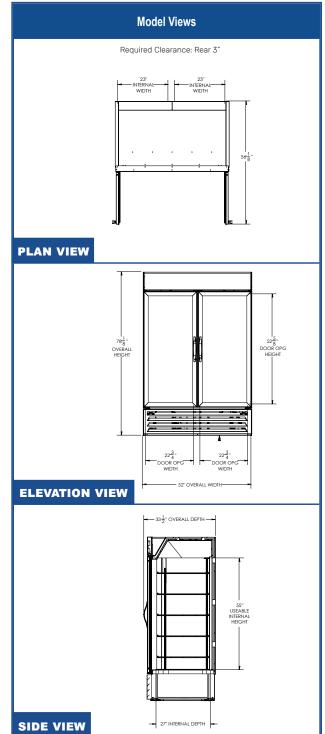





### ELECTRICAL CONNECTION

115/60/1 Unit pre-wired at factory (2) NEMA 5-15P and include 8' long cord and plug set.

3779 Champion Blvd., Winston-Salem, NC 27105 1-888-845-9800 Fax: 1-336-245-6453 Beverage-Air.com Sales@bevair.com

an Ali Group Company

